

X-NL AND P-NL SAW CUT STYLE PREFORMED VEHICLE DETECTION LOOPS



PRODUCT SPECIFICATIONS

- One continuous length of 18GA XLP insulated
- Machine twisted lead-in with a minimum of 12 turns per foot
- All loops are held securely together with a polypropylene back tape
- X-NL Saw Cut Loop fits into 3/16" saw cut
- P-NL Saw Cut Loop fits into 1/8" saw cut

FEATURES


- Ready-to-install
- Perfectly stacked wires
- Predetermined number of turns for accuracy
- One continuous loop and lead-in

BENEFITS

- Reduce time and labor
- Optimal read-height
- Better response and application of sealant
- Increased lifespan of preformed loop

X-NL AND P-NL SAW CUT PREFORMED VEHICLE DETECTION LOOPS


18GA XNL INSULATED CROSS SECTION

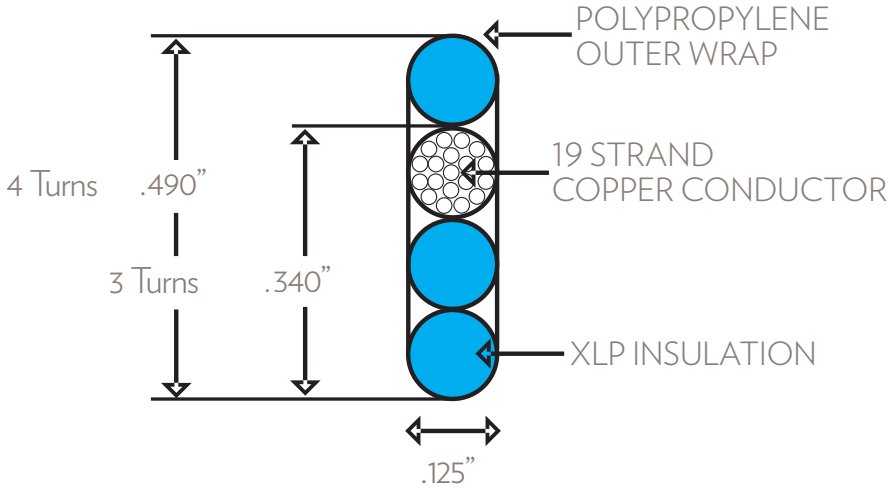

TYPICAL LOOP SIZES AND THEIR PREDETERMINED TURNS

E-NL08	E-NL10
2' X 6'	2' X 8'
3' X 5'	3' X 7'
4' X 4'	4' X 6'
	5' X 5'
NUMBER OF TURNS 4	NUMBER OF TURNS 4

18GA PNL INSULATED CROSS SECTION

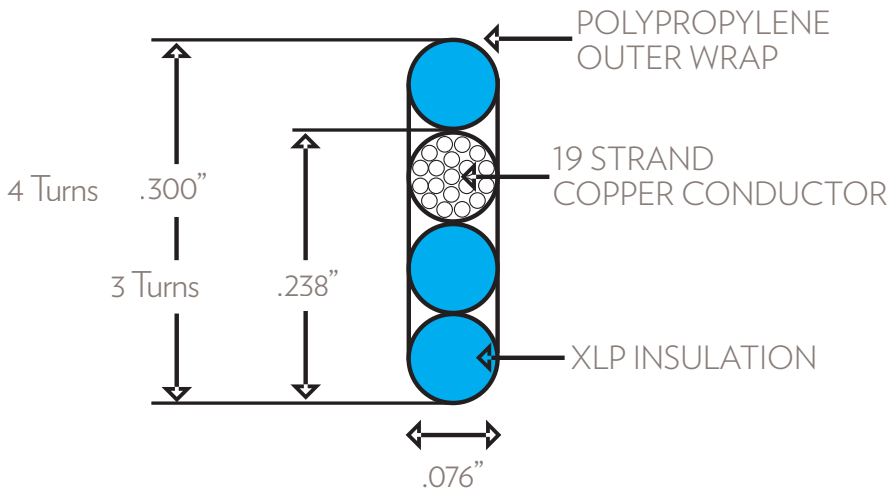

E-NL12	E-NL16
3' X 9'	4' X 12'
4' X 8'	5' X 11'
5' X 7'	6' X 10'
6' X 6'	
NUMBER OF TURNS 4	NUMBER OF TURNS 4

GUIDELINES FOR CALCULATING READ HEIGHT

2' X 6'
APPROX. OUTCOME **16"**

4' X 6'
APPROX. OUTCOME **24"**

6' X 6'
APPROX. OUTCOME **48"**